


Drawing History

Rev	Description	Date
A	Preliminary	18/08/08
B	For Approval	25/08/08

WARNING


BEWARE OF UNDERGROUND SERVICES
 THE LOCATIONS OF UNDERGROUND SERVICES ARE APPROXIMATE ONLY AND THEIR EXACT LOCATION & LEVEL SHOULD BE PROVEN ON SITE. NO GUARANTEE IS GIVEN THAT ALL EXISTING SERVICES ARE SHOWN

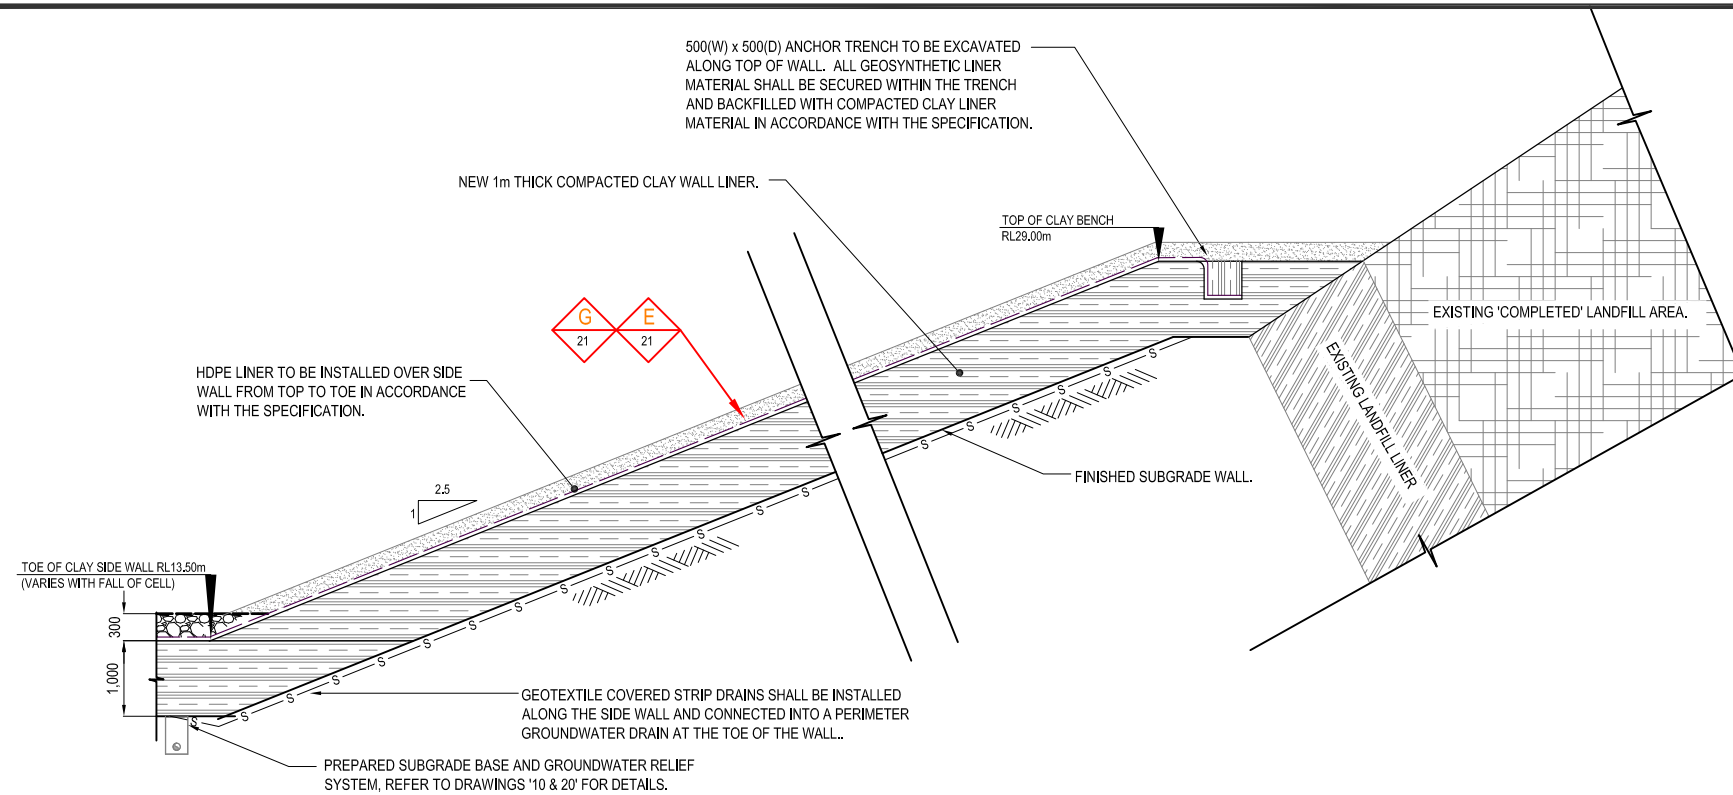

SECTION 5 NORTHERN SIDE WALL LINER ARRANGEMENT
 SCALE 1: 50

UPON COMPLETION OF THE GEOSYNTHETIC LINER INSTALLATION AND BACKFILLING OF THE ANCHOR TRENCH, THE CONTRACTOR SHALL CONSTRUCT A COMPACTED STORMWATER DIVERSION BUND AROUND THE PERIMETER OF THE SIDE WALLS. THE BUND SHALL BE FORMED USING APPROVED SUBGRADE FILL OR COMPACTED CLAY LINER MATERIAL, TO A MINIMUM HEIGHT OF 500 mm.

500(W) x 500(D) ANCHOR TRENCH TO BE EXCAVATED ALONG TOP OF WALL. ALL GEOSYNTHETIC LINER MATERIAL SHALL BE SECURED WITHIN THE TRENCH AND BACKFILLED WITH COMPACTED CLAY LINER MATERIAL IN ACCORDANCE WITH THE SPECIFICATION.

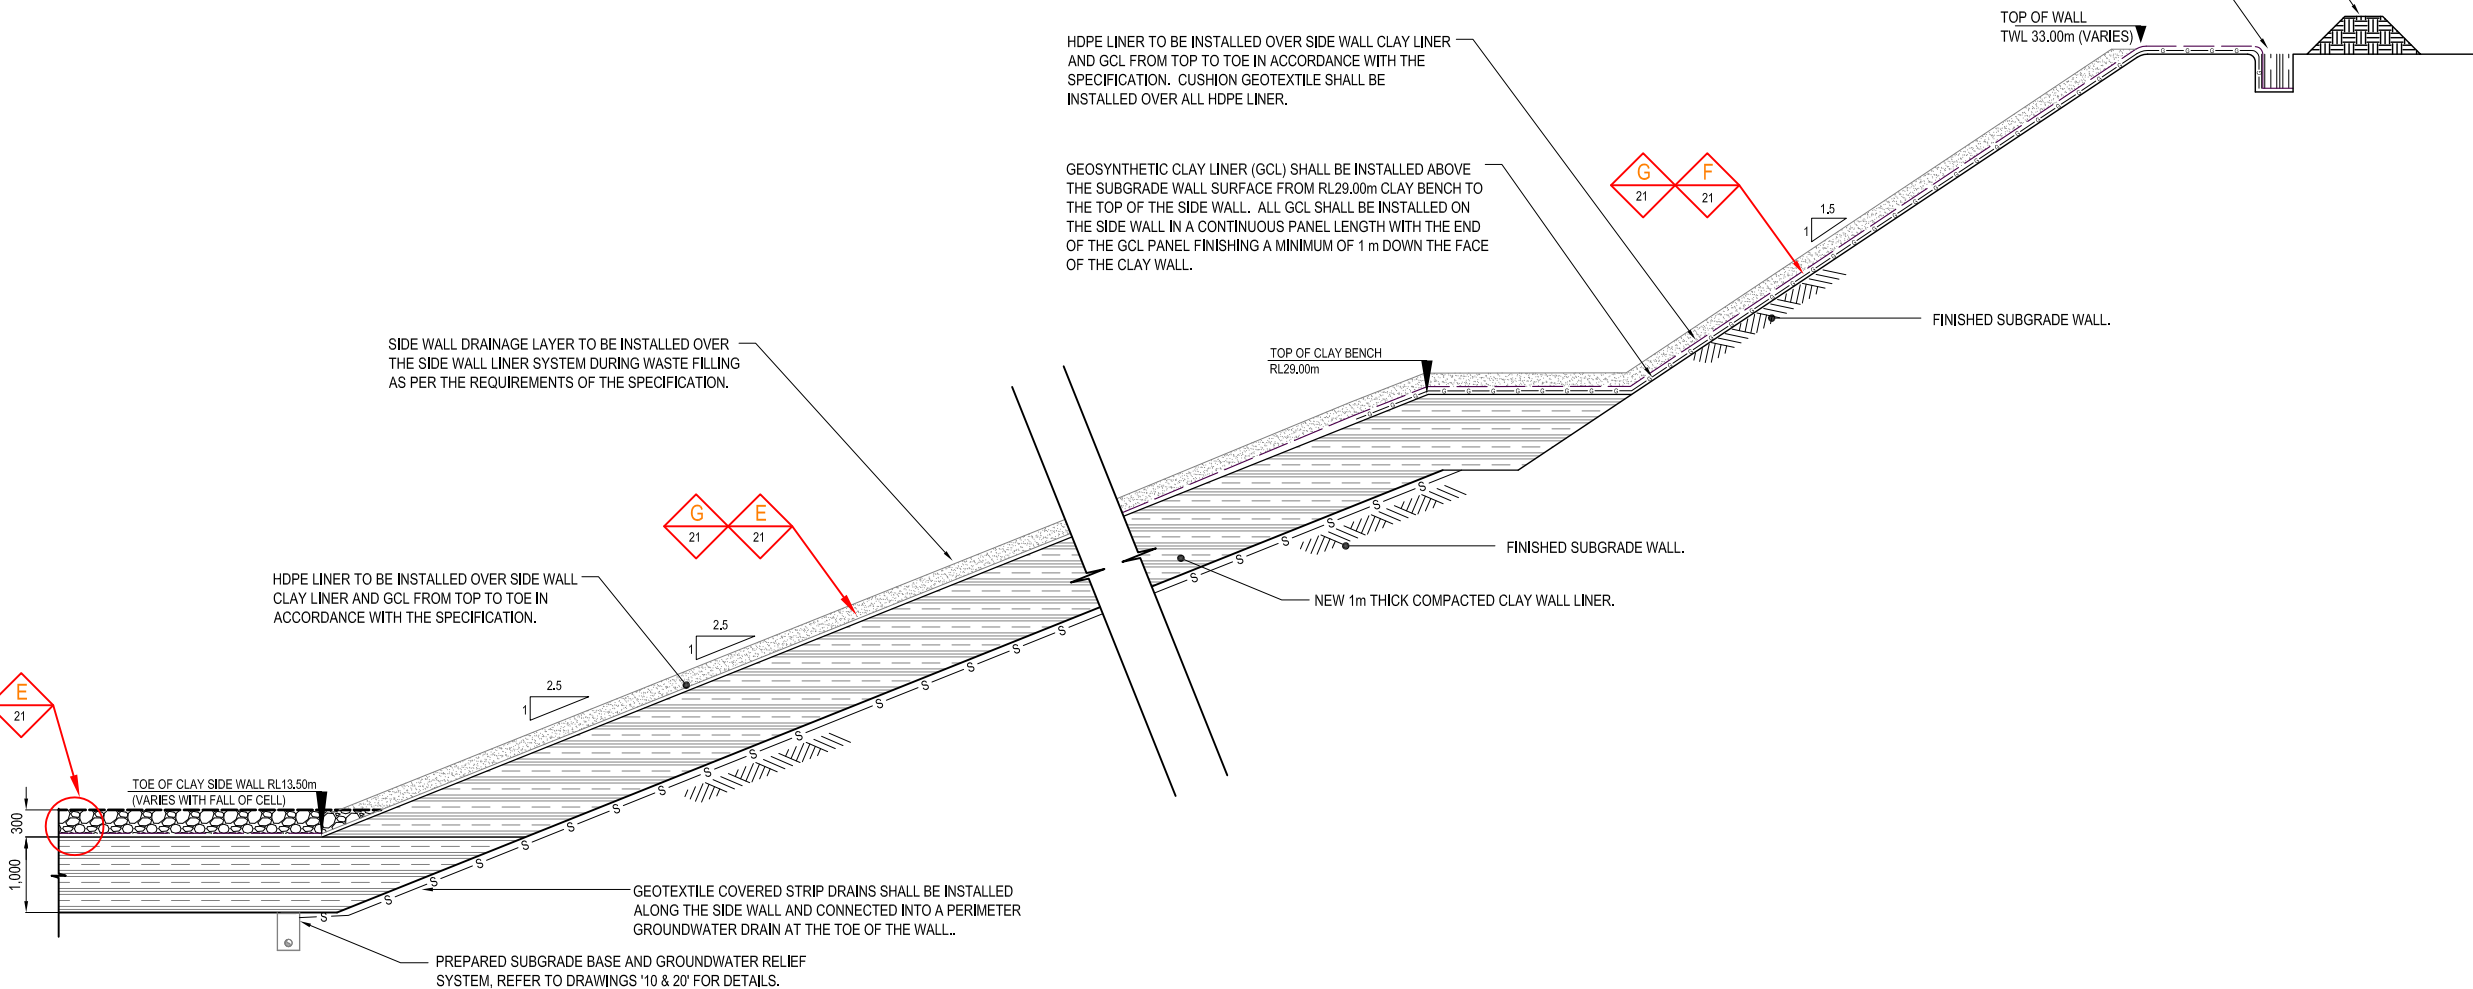

SECTION 6 EASTERN SIDE WALL LINER ARRANGEMENT
 SCALE 1: 50

Issued For Approval

Not For Construction

Scale: As Shown @ A1

Drawing	Clayton Road Landfill Joint Venture
23	Cell Liner & Leachate Collection System - Details & Sections 3 of 4
Revision	
B	Clayton Road Landfill Construction of Stage 2